DEVELOPMENT OF A FIELD-BASED MATERIALS TEST-RIG

Holger Heinzel[1], Boaz Habib[1] and Michail Karpenko[1]

[1]Heavy Engineering Research Association, 17-19 Gladding Place, Auckland, New Zealand

holger.heinzel@hera.org.nz

Keywords: Material testing, Corrosion, Fouling, Binary, Organic Rankine Cycle

ABSTRACT

Scaling also known as fouling and corrosion is a serious problem in geothermal applications. In a binary plant, the components most affected are the primary heat exchangers which are in direct contact with the geothermal fluid on the one side and the binary fluid on the other side. The build-up of scale leads to a reduction in heat exchanger efficiency while corrosion results in a reduced equipment lifetime. The extent of scaling and corrosion is a function of the chemical composition of the brine, the process conditions and the selected material. In the context of material selection, the guiding question is: 'What material performs best for any given application in the Above Ground Geothermal and Allied Technologies (AGGAT) environment'. Test results obtained under idealized conditions in laboratory set-ups need to be verified by field based testing. The NZ Heavy Engineering Research Association (HERA) in cooperation with its industry members and Universities has developed a field-based material test rig (MTR). This paper gives an overview of the features of the MTR.

1. INTRODUCTION

The Organic Rankine Cycle (ORC) is a well-established thermodynamic process that is well suited for low enthalpy applications. A secondary or binary circuit is employed to extract the heat from the primary fluid using an organic medium. The primary fluid in a geothermal context is usually separated geothermal water that has undergone previous flashing and is rich in solids and minerals. The chemical and physical characteristics of the primary fluid are highly site specific.

The build-up of unwanted material on the inside of pipes and other plant equipment, known as scaling or fouling, is a commonly reported problem in geothermal installations. As the scaling layer increases over time, the ability of the equipment to perform its intended task is reduced. The cross section of pipes is decreased resulting in an increased pressure drop leading to a reduction in flow rate. The occurrence and rate of scaling is a complex phenomenon as it is dependent on multiple factors, including brine chemistry, process and environmental conditions and surface properties and material.

Shell and tube heat exchanger is a commonly used type of heat exchanger in geothermal applications. The geothermal fluid is usually run on the tube side and the clean binary fluid is run on the shell side, as the tube side is easier to clean. The temperature drop of the primary fluid inside the heat exchanger accelerates the scale build-up. The usually low heat transfer coefficient of the scale exacerbates the detrimental effects of scaling for this plant component.

Corrosion is a well-known chemical reaction of metallic materials with their environment in which refined metals are transformed into their oxides. The occurrence of corrosion can be refined to small surface in the form of pits and cracks or affect larger surface areas. As a result, the properties of the material including strength are declining and in the worst case, corrosion can lead to a complete failure of the component. Several distinct forms of corrosions are known and while it's usually not feasible to remove the corrosion inhibitor, corrosion can be reduced or even prevented by specifying a suitable base material, surface preparation and surface finish.

Heat exchanger designers need to take into account the short and long term cost of the equipment as well as the overall efficiency of the equipment. This selection requires reliable material information which under the described circumstances cannot be derived from laboratory testing alone. A field based material test rig has been designed to supplement and verify the available information.

1.1 Material test rig

The Above Ground Geothermal and Allied Technologies (AGGAT) programme is an industry led initiative being championed by the Heavy Engineering Research Association to create a platform for above ground geothermal research. A major part of this programme is materials scaling and corrosion research. The AGGAT material test rig (MTR) is a critical deliverable of this research. It is a field based test setup that consists of three distinct parts:

- A shell and tube heat exchanger rig
- A double pipe heat exchanger rig
- A coupon rig

The shell and tube heat exchanger unit rig will be used to investigate the performance of different material types and grades for scaling under equal operating conditions. The double pipe heat exchanger unit, consisting of three individual double pipe heat exchanger units, enables the examination of scaling under different operating conditions. Corrosion performance of materials can be tested in the coupon rig using standard corrosion coupons.

2. DESIGN OF TEST RIG

The test rig is designed as a unit that can be used on a wide range of geothermal sites in New Zealand. The rig has been designed to operate with geothermal brine temperatures of up to 200°C and pressures of up to 12.5 bar.

To make the rig transportable the equipment is based on a 20 foot container base. There is one connection for incoming geothermal brine and one for incoming cooling water. The water streams are distributed to the various rigs which can be operated independently of each other. The spent brine is vented to the atmosphere in a silencer then combined with the spent cooling water in a central outlet pipeline.

The equipment falls under the New Zealand Pressure Equipment, Cranes, and Passenger Ropeways Regulations (PECPR) and a central part of the test-rig design was to achieve code compliance. All parts of the rig have been design verified by a qualified third party

The individual units are explained in more detail in the following paragraphs.

2.1 Shell and Tube Heat exchanger unit (STR)

The aim of the shell and tube heat exchanger (Fig. 1) is to compare the performance of different materials under equal operating conditions. The equipment is a single pass design and contains 19 straight tubes of 1 inch outside diameter. In order to facilitate the testing of materials of different type and grade, the tubes are not welded into the tube sheet. Galvanic separation is achieved by using plastic parts which hold the pipes in place, provide a tight seal and allow for an unequal expansion of the different tubes. The choice of standard plastic componentry is limited due to the maximum design temperature of the equipment.

The geothermal brine runs on the tube side as is common for heat exchangers in a geothermal environment. The heat exchanger is operated in vertical position to ensure complete and equal filling of the tubes. The geothermal brine runs from the bottom to the top while the flow of cooling water on the shell side is opposite to that from top to bottom.

The heat exchanger tubes will need to be exchanged for examination at regular intervals. As they are difficult to remove in vertical position the heat exchanger can be rotated into horizontal position. The header lids can be removed and tubes removed and exchanged individually from each side.

The brine flow rate and the cooling water flow rate can be adjusted and will be measured and recorded alongside temperatures at the inlet and outlet for both streams. These measurements will allow the overall performance of the heat exchanger to be calculated and also enable a performance comparison of separate trials.



Figure 1: Shell and tube heat exchanger rig

2.2 Double Pipe Heat exchanger unit (DPR)

The double pipe heat exchanger unit (Fig. 2) has been designed to research the influence of operational parameters on the material performance. Therefore a double pipe heat exchanger containing only a single straight tube has been designed. Three of these units will be built and operated in parallel. The flow of brine and cooling water can be set individually for each entity. The units will be installed horizontally and use heat exchanger tubes with the same outside diameter of 1 inch as the shell and tube heat exchanger. The heat exchanger tubes are mounted in the same way as in the shell and tube heat exchanger to facilitate galvanic isolation. The brine runs on the tube side and the cooling water on the shell side in a counter flow arrangement.

Provisions have been made on the unit to enable temperature measurement of the incoming and outgoing brine as well as the flow through each unit individually. The cooling circuit has been fitted with the same measurement points.

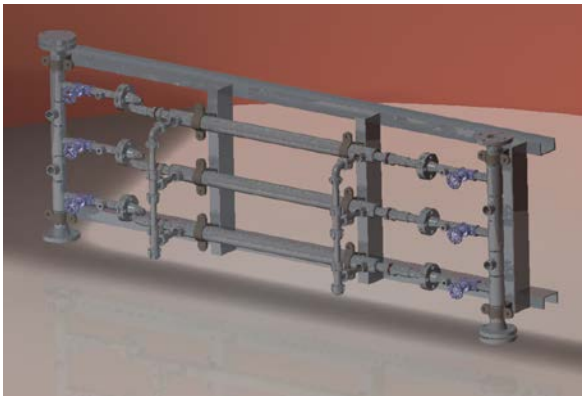


Figure 2: Set-up of the double pipe heat exchanger unit

2.3 Coupon unit (CTR)

Material corrosion will be estimated using the weight loss method based on corrosion coupons. The coupons are mounted on a pre-existing multi coupon holder which has been designed for 100mm (NB) pipelines. As the main pipes of the test-rig are 50mm (NB) a section of pipe has been designed to house the coupon test holder (Fig. 3). Flanges have been added to each side to facilitate replacement of the test specimen. The coupon test unit can also be used to research stress corrosion cracking using a slightly modified version of test coupons.

The flow of brine through the coupon unit can be set independent of the other two units on the material test rig. Unlike the previous two units, the coupon unit is not cooled. The flow of brine is measured and will be recorded.

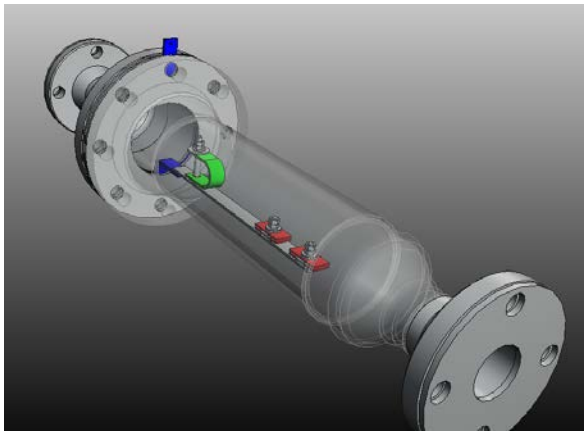


Figure 3: Corrosion unit with weight loss coupons and stress corrosion coupons

2.4 Piping

The rig has been designed as a self-contained unit consisting of the three testing units and an atmospheric silencer which is required to discharge spent brine into an open drain. The rig has got a total of three connections: one for the incoming geothermal fluid, one for the incoming cooling water, and one for outgoing spent fluids. The piping distributes the fluids to the different units and allows for independent operation and control of each item.

The cooling circuit is connected to the brine side of the heat exchanger units to allow these to be filled with water before the brine tap is opened and operation is started.

High and low points have been fitted with vents and drains respectively. Further sampling points are included in the design.

A thermal stress analysis of the piping has been carried out as part of the design process. The material test rig including piping is depicted in Figure 4

2.5 Deployment site

A first deployment site for the Material test rig has been secured by the AGGAT team at HERA. The site is located near the Ohaaki power station and receives its geothermal brine from Contact Energy. The fluid supplied to the site is a mixture of brine from five and more wells and is separated twice along the way.

The material test rig is located at the back end of an industrial process existing on site. By the time the brine enters the test rig it has reached a temperature of about 135°C and a pressure of 300 kPa.

3. CONCLUSION

A field based test-rig has been designed and built that enables in-situ analysis of materials intended for the use in low-enthalpy geothermal applications. Consisting of a range of test units it enables a comparative and quantitative analysis of material performance.

ACKNOWLEDGEMENTS

The Above Grou nd Geothermal and Allied Technologies (AGGAT) science research programme is a collaborative effort between NZ Universities, Heavy Engineering industry and Ministry of Business, Innovation and Employment (MBIE). Several industry companies have contributed to the design, fabrication and operation of the equipment.

The authors acknowledge the contributions of the following companies: BOP Gear Cutters LTD, Contact Energy, Dobbie Engineers Lt, H. J. Asmuss & Co. Ltd., Index Engineering, Initiative Engineering, PFS Engineering Ltd, Steel & Tube Holdings Limited

REFERENCES

American society of mechanical engineers (ASME): *Boiler & Pressure Vessel Code - Section VIII - Pressure Vessels*. ASME Standard, (2015).

Standards Association of Australia,. *AS 1210 Pressure Vessels*, Australian Standard, (2010).

NZ Legislation, *Health and Safety in Employment (Pressure Equipment, Cranes, and Passenger Ropeways) Regulations 1999, NZ Legislation*, (1990)

Kuppan, T., *Heat Exchanger Design Handbook*, CRC, (2000)

Zarrouk, S. J., Woodhurst, B. C., and Morris, C., *Silica scaling in geothermal heat exchangers and its impact on pressure drop and performance: Wairakei binary plant*, New Zealand, Geothermics 51, 445–459, (2014)

Kokhanenko, P., Masuri, S., Jermy, M., Sellier, M., and Brown, K. *Hydrodynamics and Electrochemistry of Silica scaling* New Zealand Geothermal Workshop, (2012).

Babler, R., Burkert, A., Saadat, A., Kirchheiner, R., Finke, M., and others., *Evaluation of corrosion resistance of materials for geothermal applications*, Corrosion 2009, NACE International, (2009)

Baticci, F., Genter, A., Huttenloch, P., and Zorn, R. *Corrosion and scaling detection in the Soultz EGS power plant, Upper Rhine Graben, France*. World Geothermal Congress, WGC2010, Bali, Indonesia, (2010)

Mundhenk, N., Huttenloch, P., Sanjuan, B., Kohl, T., Steger, H., and Zorn, R., *Corrosion and scaling as interrelated phenomena in an operating geothermal power plant*, Corrosion Science, Elsevier 70, 17–28, (2013)

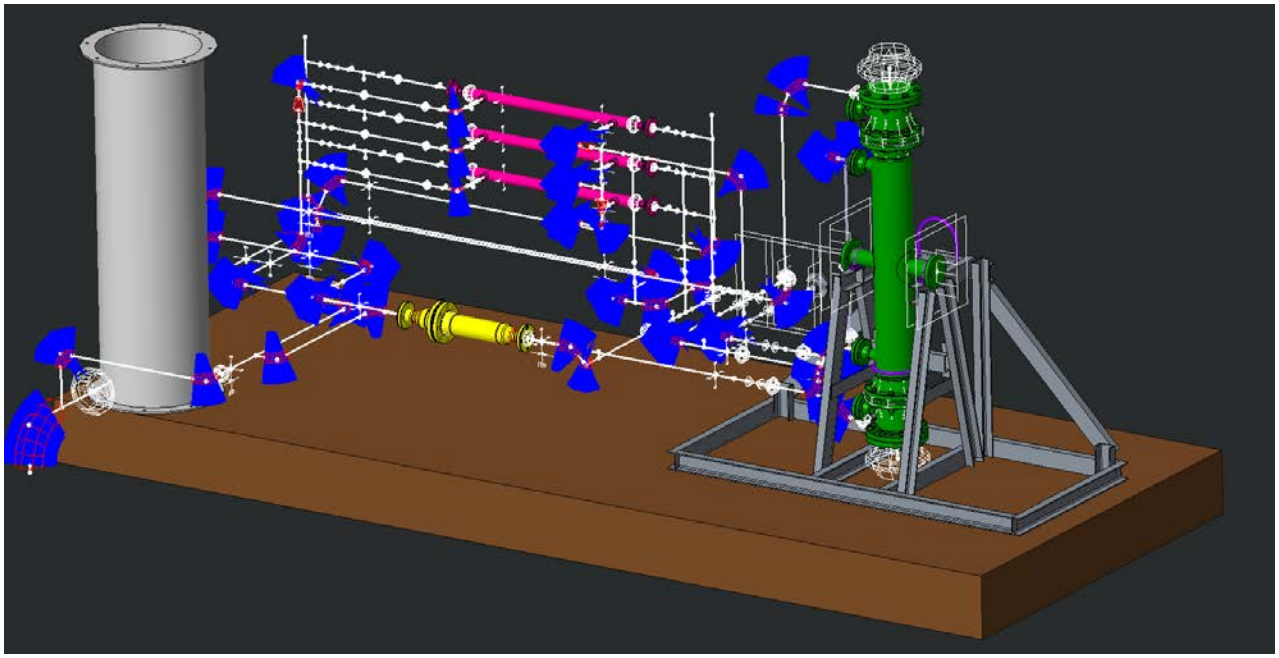


Figure 4: Material test rig mounted on Container base: STR (green), DPR (pink), CTR (yellow) and Silencer (grey), pipework (white)