

# Improving Bottom-Hole Temperature Corrections on the Basis of Statistical Correlations

Thorsten Agemar

Leibniz Institute for Applied Geophysics, Stilleweg 2, 30655 Hannover, Germany

thorsten.agemar@leibniz-liag.de

**Keywords:** temperature, correction, BHT, statistics, data base, information system, GeotIS

## ABSTRACT

In Germany, most available data on subsurface temperature distribution come from hydrocarbon exploration activities. So-called bottom-hole temperature measurements (BHT) represent the largest part of all measured subsurface temperatures. These BHTs are available for approximately 11.000 industrial boreholes. Some wells have BHTs for more than one depth. Raw BHTs provide the temperature only a few hours after drilling has stopped. The temperature field around a borehole is usually disturbed by mud circulation related to the drilling process for several weeks. A number of methods to extrapolate the true formation temperature have therefore been developed based on various assumptions about the cooling effect of the circulating mud and the thermal behaviour of the borehole. The choice of the most appropriate correction method depends on the availability of data such as the circulation period, number of subsequent measurements with shut-in times, and the well radius. Despite such corrections, these results still have errors of up to  $\pm 8$  to 10 K, and are therefore much less accurate than equilibrium temperature logs. Generally, BHT correction requires a time series of two or more measurements for optimal fitting. However, many well reports provide only one BHT value with shut-in time. A statistical analysis of 385 temperature records revealed a correlation between well radius and initial temperature deviation. This correlation has been used to estimate the initial temperature difference at  $t=0$  for a correction based on the cylinder source model. For a number of sites, BHT values corrected with this new method were compared with equilibrium temperature logs or temperature recordings during hydraulic production tests from neighbouring wells. This comparison proved that the new method is robust and reliable.

## 1. INTRODUCTION

For the preparation of temperature maps and 3D temperature models, individual measurements in the deepest boreholes are used in addition to disturbed and undisturbed temperature logs, reservoir temperatures and production tests.

The Leibniz-Institute for Applied Geophysics has a long history of collecting and evaluating subsurface temperature data. It stores temperature data in the Geophysics Information System [FIS-GP](#) (Kühne et al. 2003). The FIS-GP contains data from the LIAG and from other institutions, too.

The geothermal subsystem of FIS-GP contains approx. 11,000 boreholes with temperature data. Equilibrium temperature logs and reservoir temperatures are considered optimal data which require no corrections. Because of the periodic monitoring of some production wells over many years, reservoir temperatures are available in time series; the fluctuation of these temperatures is mainly less than 1 K. Temperature measurements in the course of hydraulic production tests are generally also of high quality. The quality depends on the test duration. However, measurement results may be falsified by a previously performed injection test. Unfortunately, the bulk of subsurface temperature data is of lower quality, like for instance bottom-hole temperatures (BHT) which are recorded in almost all industrial boreholes at the deepest point of the well immediately after drilling has stopped. The temperature field around a borehole is usually disturbed by mud circulation related to the drilling process. A number of methods to extrapolate from BHT to the undisturbed temperature have therefore been developed based on various assumptions about the cooling effect of the circulating mud and the thermal behaviour of the borehole and the surrounding rock.

Different extrapolation methods can be used depending on the shut-in time (time elapsed after the end of drilling until measurement), the mud circulation time and the number of temperature values available for each depth (Agemar et al. 2012, Schulz and Schellschmidt 1991, Schulz et al. 1990, Schulz et al. 1992, Schulz and Werner 1987).

FIS-GP automatically suggests the most appropriate correction method for raw temperature according to availability of parameters like borehole radius, number of shut-in times /measurements and so on. However, operators are still able to override automatic decisions or to de-activate implausible measurements manually.

This study focusses on bottom hole temperature corrections with only one shut-in time available.

## 2. METHODS

If there are three or more BHT values at a depth at different shut-in times, the cylinder source correction might be used (Leblanc et al. 1982, Middleton 1982). With this approach, the temperature of the flushing liquid is assumed to be constant after stopping the circulation ( $t = 0$ ) and deviates by the amount  $\Delta T$  from the true equilibrium formation temperature.

$$T_{\infty} = BHT(t) - \Delta T(e^{\frac{-a^2}{4\kappa t}} - 1) \quad (1)$$

where  $T_{\infty}$  = undisturbed rock temperature (°C)

BHT = measured bottom hole temperature (°C)

$\Delta T$	=	initial temperature disturbance (K)
$a$	=	borehole radius (m)
$\kappa$	=	thermal diffusivity (m <sup>2</sup> /s)
$t$	=	time after circulation stops, shut-in time (s)

$T_{\infty}$  is calculated by a fitting approach that varies  $\Delta T$  and  $\kappa$ , where  $\kappa$  is the effective thermal diffusivity of the flushing fluid and the surrounding rock (Schulz et al. 1992).

This method has also been used for BHT values with only one shut-in time (Schulz and Werner, 1987: p.14, Bolotovskiy et al. 2015). In this case, the initial temperature deviation instead of a second BHT value must be used for fitting. Originally, the initial temperature deviation was estimated relatively simply from the mean value of undisturbed equilibrium formation temperature and average surface temperature:

$$\Delta T = T_{\infty} - T_m = T_{\infty} - \frac{(T_{\infty} + T_0)}{2} \quad (2)$$

With  $T_0$  = mean annual soil temperature [°C]

$T_m$  = mud temperature at the end of drilling [°C]

From equations [1] and [2] one obtains for the equilibrium temperature:

$$T_{\infty} = \text{BHT}(t) + \frac{1 - e^{-a^2/4\kappa t}}{1 + e^{-a^2/4\kappa t}} (\text{BHT}(t) - T_0) \quad (3)$$

Fixed parameters were used for the corrections, which were determined on the basis of experience, numerical tests and statistical data (Bolotovskiy et al. 2015, Schulz and Werner 1987):

well radius:  $a = 0,08 \text{ m}$  (6 1/4" pipe)

thermal diffusivity:  $\kappa = 0,15 \cdot 10^{-6} \text{ m}^2/\text{s}$ .

Within FIS-GP 2,156 BHT data sets exists with only one shut-in time. The equilibrium formation temperature was calculated in FIS-GP for these 2,156 BHT values until 2017. If the actual borehole diameter is used instead of the fixed diameter of 6.25 inches, the correction would be significantly too high for many BHT values. On the other hand, it is unsatisfactory that the known diameter is not used for the correction, although it is entered in the database for most BHT measurements with one available shut-in time. For some records, the diameter of the last drill section is not noted, but it can at least be guessed from the last pipe.

Doubts are also cast on formula [2], the estimation of  $\Delta T$ , the temperature of the mud directly after the end of drilling. Although it is plausible that  $\Delta T$  depends on the difference between rock temperature and surface temperature, whether and how  $\Delta T$  and borehole diameter correlate with each other is less obvious. A larger mud volume should lead to a larger  $\Delta T$  at the same mud speed. However, the use of a larger drill bit also increases the frictional heat to be dissipated. At the same time, the larger borehole wall leads to a higher heat exchange between the drilling fluid and the rock. Due to this complexity, an empirical determination by  $\Delta T$  is proposed. Unfortunately, information on  $\Delta T$  is generally not available. However,  $\Delta T$  values can be estimated for wells for which three or more shut-in times are available for one depth. In this way,  $\Delta T$  values for different borehole diameters could be obtained from 385 datasets. The results show that  $\Delta T$  behaved reciprocally to the drill hole radius  $a$  (with a coefficient of determination  $r^2 = 0.52$ ). The following empirically determined relation can be used as a new approach to estimate  $\Delta T$  for data sets with only one shut-in time:


$$\Delta T = \frac{(T_{\infty} - T_0)}{31a} \quad (4)$$

In Fig. 1, both approaches can be compared for the prognosis of  $\Delta T$ . This shows that the  $\Delta T$  values determined with formula [2] not only show a greater dispersion ( $r^2=0.42$ ), but also tend to result in  $\Delta T$  values that are too high, i.e. overestimate the initial temperature disturbance.

From the formulas [1] and [4] one obtains now for the equilibrium temperature:

$$T_{\infty} = \frac{\text{BHT}(t) \cdot 31a + T_0(e^{-a^2/4\kappa t} - 1)}{31a + (e^{-a^2/4\kappa t} - 1)} \quad (5)$$

In contrast to the old correction method, the actual borehole radius  $a$  is again used instead of the fixed dimension 0.08 m (Ø 6 1/4" pipe). For the corrections, only the thermal diffusivity with  $\kappa = 0.15 \cdot 10^{-6} \text{ [m}^2/\text{s]}$  is used as a fixed parameter, which was determined on the basis of experience, numerical tests and statistical data (Schulz and Werner 1987). This allows the estimation of undisturbed equilibrium formation temperature from only one shut-in time with greater accuracy than before.

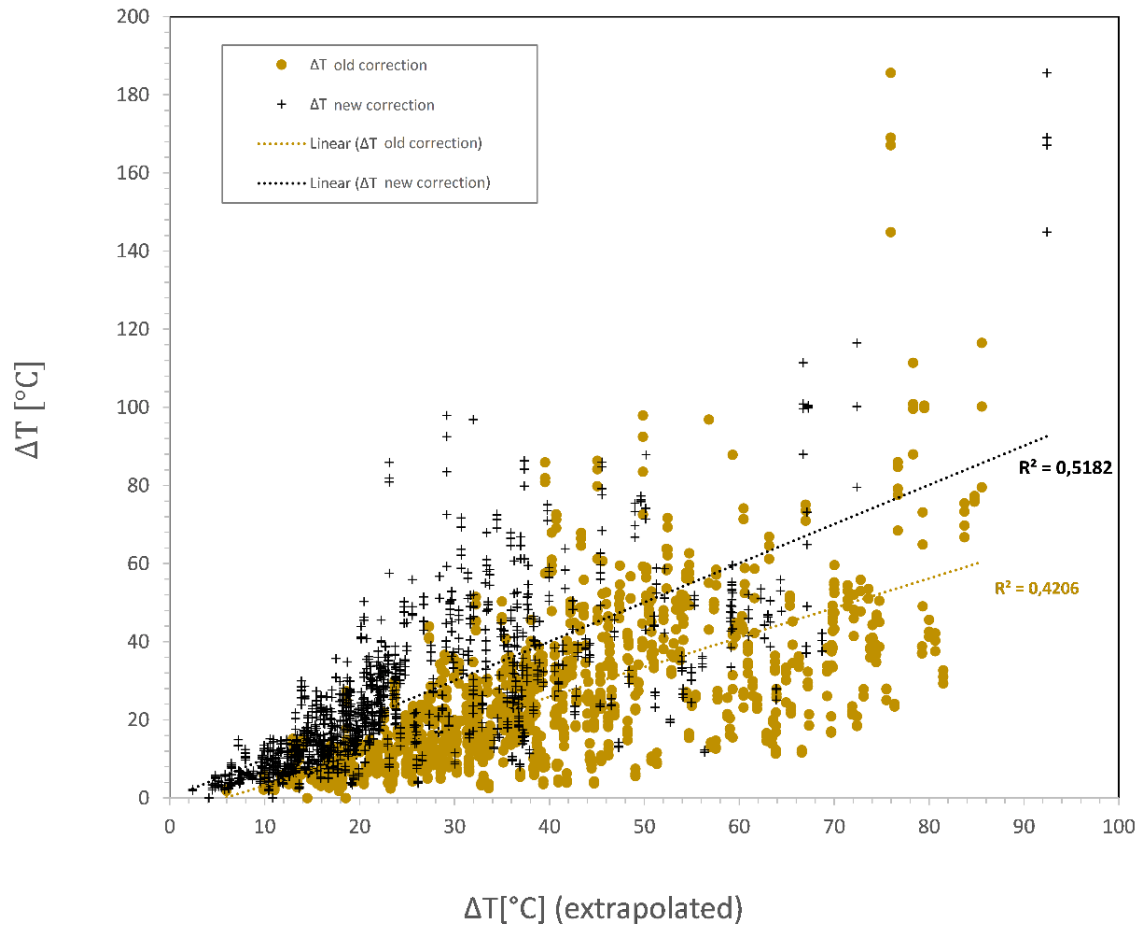


**Figure 1:**  $\Delta T$  values calculated according to formula 4 (crosses) and formula 2 (circles) plotted against extrapolated  $\Delta T$  values from a sequence of 3 or more BHT measured values (cylinder source model approach).

#### 4. RESULTS

In Figure 2, the corrected BHT values are plotted against each other according to the old and new correction methods. The BHT values corrected according to the old method are plotted on the abscissa. The BHT values corrected according to the new method are plotted on the ordinate. The results of the new correction procedure are very similar to the old estimates in most cases. If the geothermal gradients are determined from the newly corrected BHT values, the overall variance is somewhat lower ( $70 \text{ K}^2$  instead of  $96 \text{ K}^2$ ). The mean value over all 2156 temperature values is only approx.  $1.6 \text{ K}$  lower for the newly corrected BHT values than for the BHT values corrected according to the old method. For comparison: If the raw temperatures were corrected with the current  $\Delta T$  estimate according to formula [2] and the actual borehole diameters in Formula [1], the mean value of all corrected temperatures would be approx.  $15 \text{ K}$  higher (Figs. 3+4).

Nevertheless, the new correction procedure can make a significant difference in local temperature forecasts. This becomes particularly clear when comparing corrected BHT values with precisely measured temperatures in the immediate vicinity. Table 1 shows some examples where the two correction methods result in very different temperatures. A comparison with reliably measured temperatures in the immediate vicinity at approximately the same depth shows that the new correction method provides more reliable results. In addition, the lower variance of the corrected temperature values and the gradient derived from them also speak in favour of the new method. What speaks against the old method is that there is no empirical evidence for the estimation made in Formula 2 and that the cylinder source model correction was in most cases carried out with the wrong borehole radius.

Figure 3 clearly shows that the corrected BHT values from boreholes at shallow depths ( $< 500 \text{ m}$ ) scatter very strongly. This effect becomes particularly clear when the gradients are considered (Figure 4). It appears that BHT values measured at shallow depths are more difficult to correct than BHT values measured at greater depths. These values will therefore be deactivated in FIS-GP.

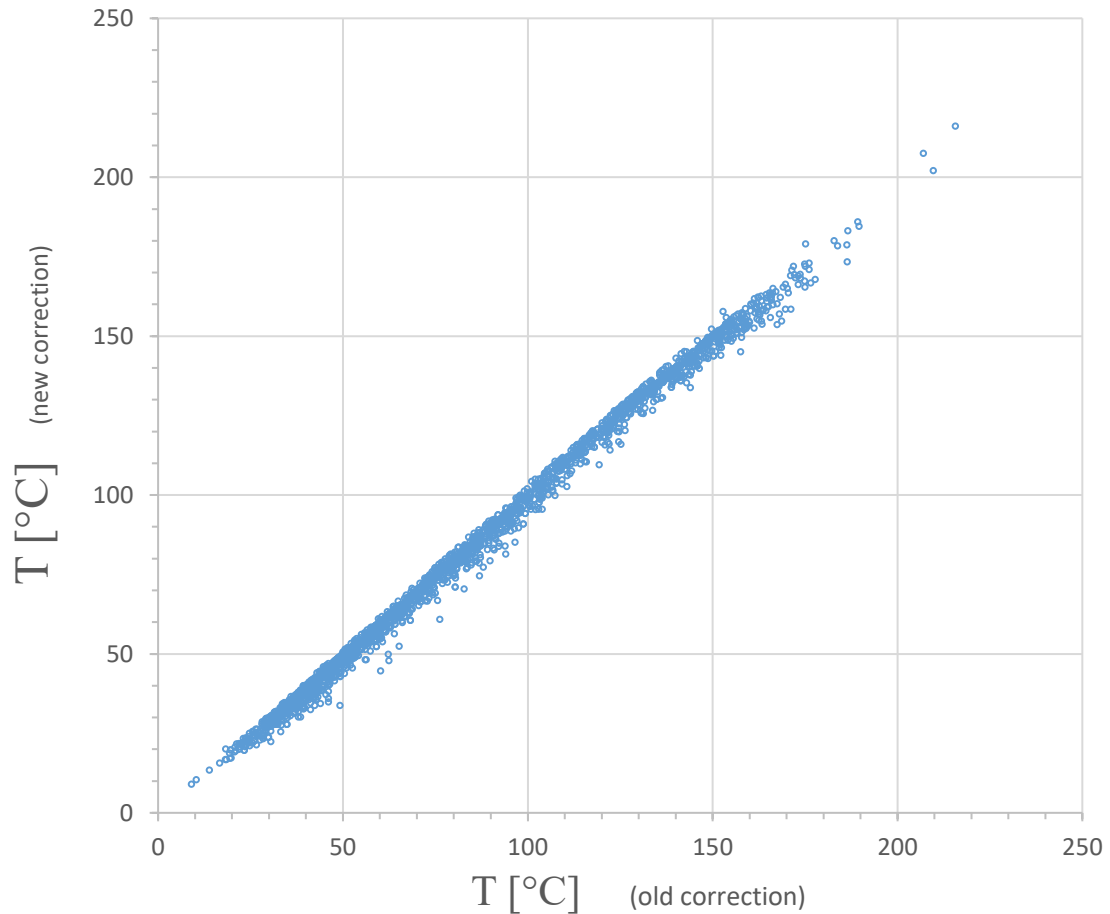

**Figure 2: Comparison of the old and new correction procedure for BHT values with only one shut-in time at one depth.**


If the borehole diameter is unknown, the average value of 0.12 m can be used for the radius  $a$ . If the shut-in time of a measurement is unknown, it is estimated in FIS-GP on the basis of a statistical estimate. As described by Bolotovskiy et al. (2015), the shut-in time  $t$  is determined as a function of the measurement depth:

$$t \text{ [s]} = (3,612 \text{ [h]} + 0,001639 \text{ [h/m]} \cdot z \text{ [m]}) \cdot 3600 \quad (6)$$


However, the use of equation [6] brings huge uncertainty to the determination of the initial temperature deviation  $\Delta T$ . The use of corrected BHTs with statistical shut-in time estimate is not recommended.

Table 2: Formation temperatures determined according to formula [2] and [5] and comparative values from adjacent boreholes with high quality measurements at similar depths (in blue).

Borehole	Depth [m]	T [°C] -old-	T [°C] -new-	Type	Distance [km]
1 North German Basin	1727	82,69	70,52	BHT	1
2 North German Basin	1791	86,88	74,66	BHT	
V1+2	1650		72,4	equil. log	
3 Molasse Basin	1570	76,15	60,94	BHT	1
V3	1500		63,56	equil. log	
4 North German Basin	4577	169,64	158,5	BHT	10
V4	4652		152,0	hydr. test	
5 North German Basin	1187	62,23	49,95	BHT	8
V5a	1200		44,42	equil. log	
V5b	1200		43,91	equil. log	

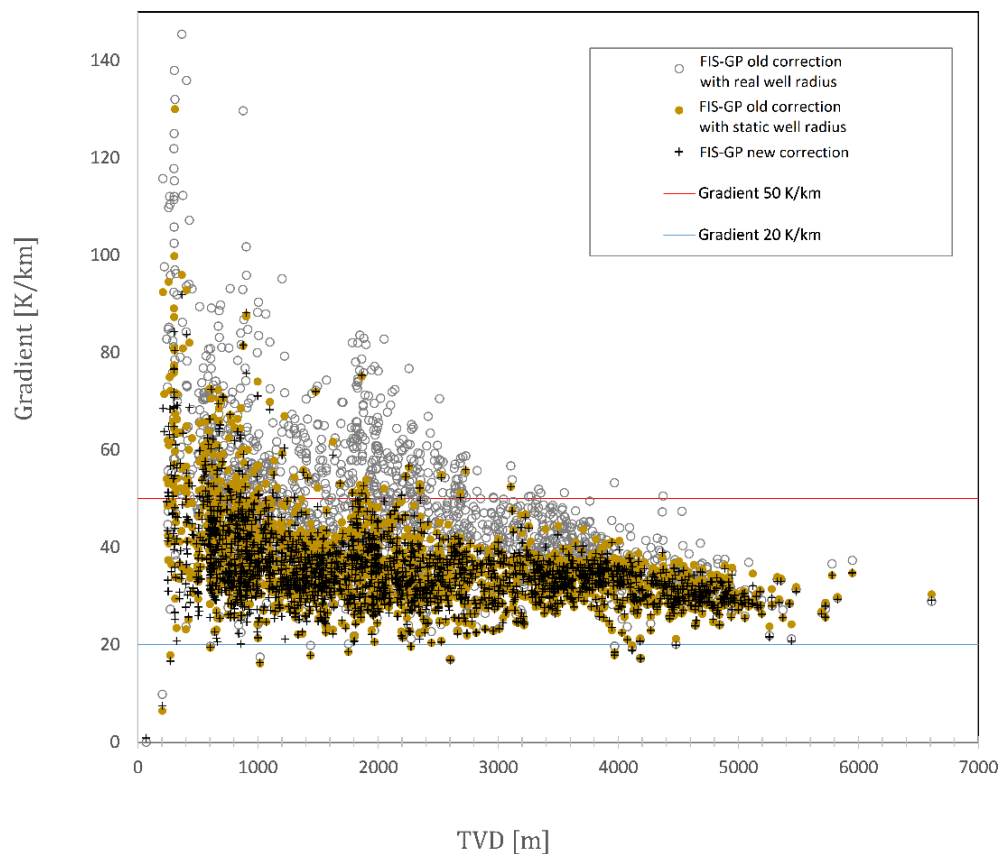

**Figure 3:** The formation temperatures determined from the corrected BHT values are plotted against the depth. Crosses refer to the new correction. Grey circles refer to the old correction if a fixed radius would have been used. Brown discs show corrected BHTs before the new correction method was introduced.

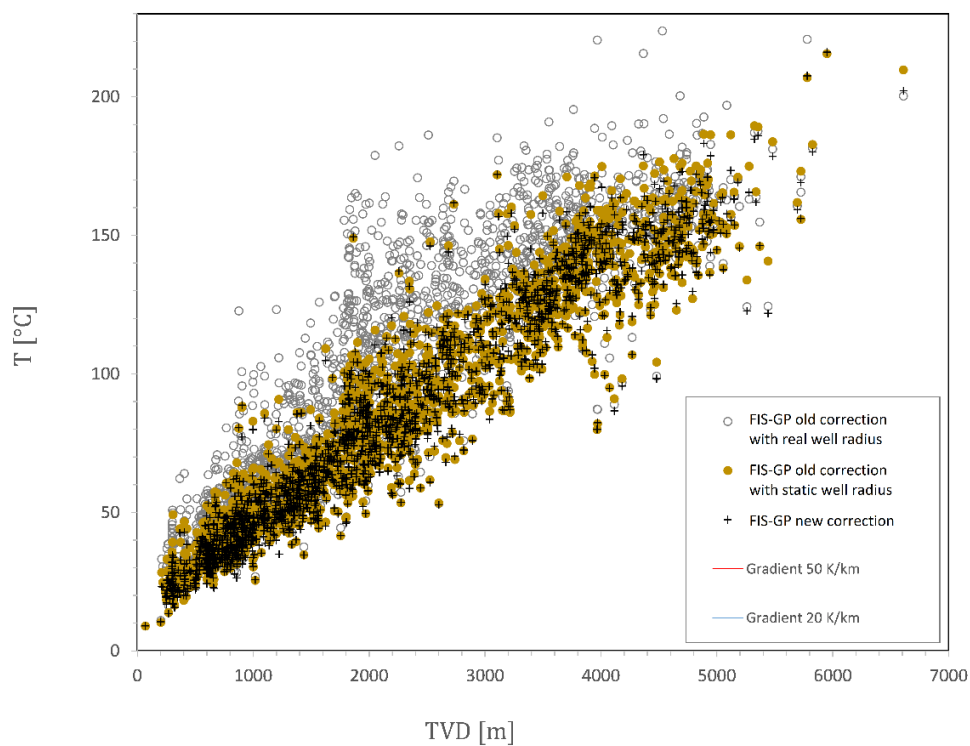

**Figure 4:** Gradients determined from the corrected BHT values are plotted against the depth. The strong scattering for depths less than 500 m is partly due to the fact that small changes in temperature cause large changes in the gradient.

## 5. CONCLUSIONS

It is well known that the uncertainty of corrected BHTs is generally high on the order of  $\pm 8$  K (Förster, A. 2001). It might be even higher in the case of incomplete data sets. In this study, new correction methods based on statistical analyses were developed to improve the correction of BHTs if only one measurement (shut-in time) is available. A test revealed a substantial improvement compared to the previously applied correction method. Since the corrected temperatures are used for the calculation of the geostatistical 3D temperature model of the geothermal information system GeotIS (Agemar 2020), the assessment of uncertainty is very important. High quality data must be preferred over low quality data but low quality data might be better than remote or no data. Knowledge about the degree of certainty of specific data categories may help to improve subsurface temperature predictions for future geothermal projects. The comparison between corrected BHTs according to the new method and high quality temperature data (Table 2) indicates a standard error of just  $\pm 5$  K. However, as the random sample is very small, reliable information on the standard error cannot be provided.

## ACKNOWLEDGEMENTS

Part of this work has been funded by the German Federal Ministry for Economic Affairs and Energy (BMWi) within the framework of the Geofaces project (Grant no. 0324025A).

## REFERENCES

- Agemar, T.: 3D-Temperature Estimation Using Geostatistical Methods. *Proceedings of the World Geothermal Congress 2020*, April 26 – May 2, Reykjavik, Iceland
- Agemar, T., Schellschmidt, R., and Schulz, R.: Subsurface temperature distribution in Germany. *Geothermics* **44**, (2012), 44, 65–77.
- Agemar, T., Alten, J.-A., Ganz, B., Kuder, J., Kühne, K., Schumacher, S., and Schulz, R.: The Geothermal Information System for Germany – GeotIS. – *Z. Dt. Ges. Geowiss.*, **165**(2), (2014), 129-144.
- Bolotovskiy, I., Schellschmidt, R., and Schulz, R. Fachinformationssystem Geophysik: Temperaturkorrekturverfahren. LIAG-Bericht, Archiv-Nr. **0132527**; (2015), Hannover.
- Förster, A.: Analysis of borehole temperature data in the Northeast German Basin; continuous logs versus bottom-hole temperatures. *Petroleum Geoscience*, **7**, (2001), 241–254.
- Kühne, K., Maul, A.-A., and Gorling, L.: Aufbau eines Fachinformationssystems Geophysik. – *Z. Angew. Geol.* **2**, (2003), 48-53; Hannover.
- Leblanc, Y., Lam, H.-L., Pascoe, L.J., and Jones, F.W.: A comparison of two methods of estimating static formation temperature from well logs. *Geophys. Prosp.* **30**, (1982), 348-357.
- Middleton, M.F.: Bottom-hole temperature stabilization with continued circulation of drilling mud. *Geophysics*, **47**, (1982), 1716-1723.
- Schulz, R., and Schellschmidt, R.: Das Temperaturfeld im südlichen Oberrheingraben. *Geologisches Jahrbuch*, **48**(E), (1991), 153-165. (in German)
- Schulz, R., Haenel, R., and Kockel, F.: Federal Republic of Germany - West federal states. - In: Hurtig, E., Cermak, V., Haenel, R., Zui, V. (Eds.): *Geothermal Atlas of Europe*, Gotha, Germany, (1992), 34-37.
- Schulz, R., Hänel, R., and Werner, K.H.: Geothermische Ressourcen und Reserven: Weiterführung und Verbesserung der Temperaturdatensammlung. - Report EUR 11998 DE: 75 pp, (1990), Luxembourg (Office for Official Publications of the European Communities).
- Schulz, R., and Werner, K.H.: Einfache Korrekturverfahren für Temperaturmessungen. – NLfB-GGA-Bericht, Archiv-Nr. **99914**, (1987), Hannover.
- Schulz, R., and Werner, K.H.: Geothermal Resources and Reserves: Updating of Temperature Data Base. - In: Louwrier, K., Staroste, E., Garnish, J.D., Karkoulas, V. (Eds.): *European Geothermal Update*. In: *Proceedings of the 4th International Seminar on Results of EC Geothermal Energy Research and Demonstration*, Kluwer Academic Publishers, Dordrecht, (1989), 490-499.